



**RASAERBA CON SCARICO POSTERIORE mod. TRP - ANTERIORE / POSTERIORE**  
MOWER REAR DISCHARGE type TRP - FRONT SIDE / REAR SIDE

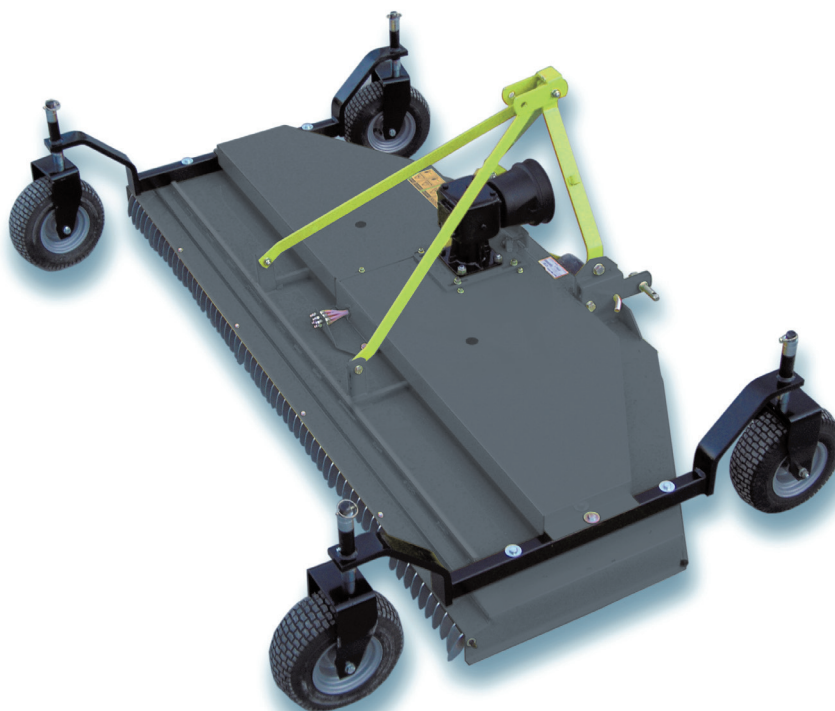

Di serie:

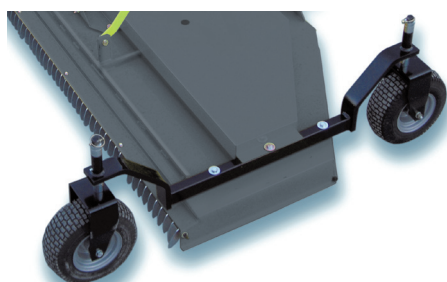

- Attacco cat. 1
- Ruote pivotanti
- Altezza taglio regolabile
- Cardano standard
- Protezioni antinfortunistiche "CE"
- Manuale uso e manutenzione



## SICHELMULCHER TRP MIT SEITLICHEM HECKAUSWURF - FRONT / HECKANBAU

TONDEUSE EJECTION ARRIERE mod. TRP - FRONTAL EJECTION / ARRIERE EJECTION



	HP-KW	 mm.		 HLP	 Kg
TRPA 120	12-20	1200	3	500x1280x1130	175
TRPA 150	15-30	1500	3	500x1580x1260	205
TRPA 180	20-40	1800	3	500x1880x1280	230
TRPA 215	40-60	2150	3	500x2230x1280	265
TRPA 235	40-60	2350	3	500x2380x1260	300
TRPP 120	12-20	1200	3	500x1280x1130	180
TRPP 150	15-30	1500	3	500x1580x1260	210
TRPP 180	20-40	1800	3	500x1880x1280	235
TRPP 215	40-60	2150	3	500x2230x1280	270
TRPP 235	40-60	2350	3	500x2380x1260	305

### Standard:

Three point linkage cat. 1  
Adjustable pivoting wheels  
Adjustable cutting height  
Shaft standard  
"CE" safety protection  
Manual Instruction

### Grundausstattung:

Dreipunkt Anbau Kat. 1  
Drehbare Räder  
Schnitthöhen verstellung  
Gelenkwelle Standart  
EG Unfallschutzvorrichtung  
Bedienungsanlage

### En série:

Attaque Cat. 1  
Roues pivotantes  
Hauteur de coupe réglable  
Cardan standard  
Rouleau protections de sécurité  
Utilisation et maintenance

